
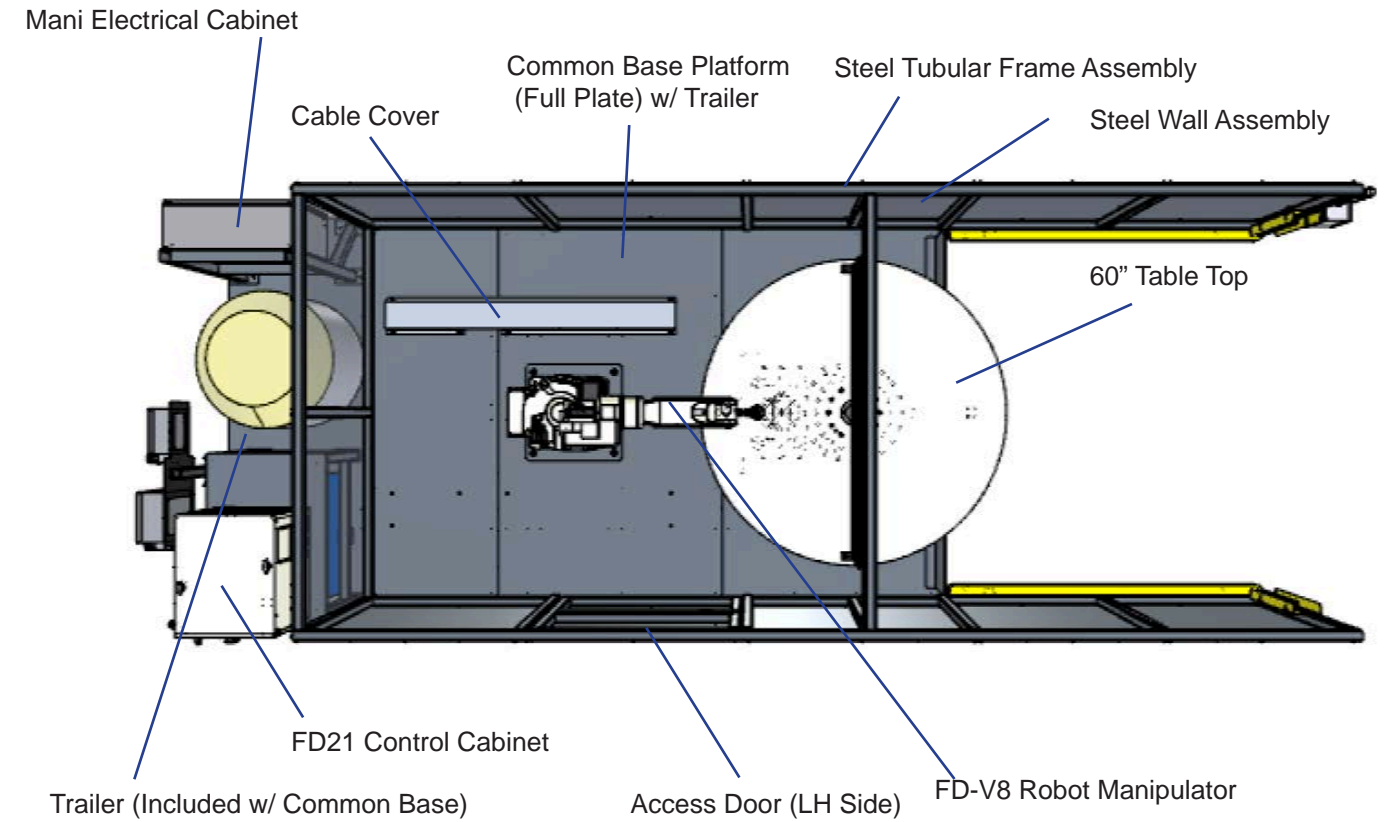


SERVO-ARC 600

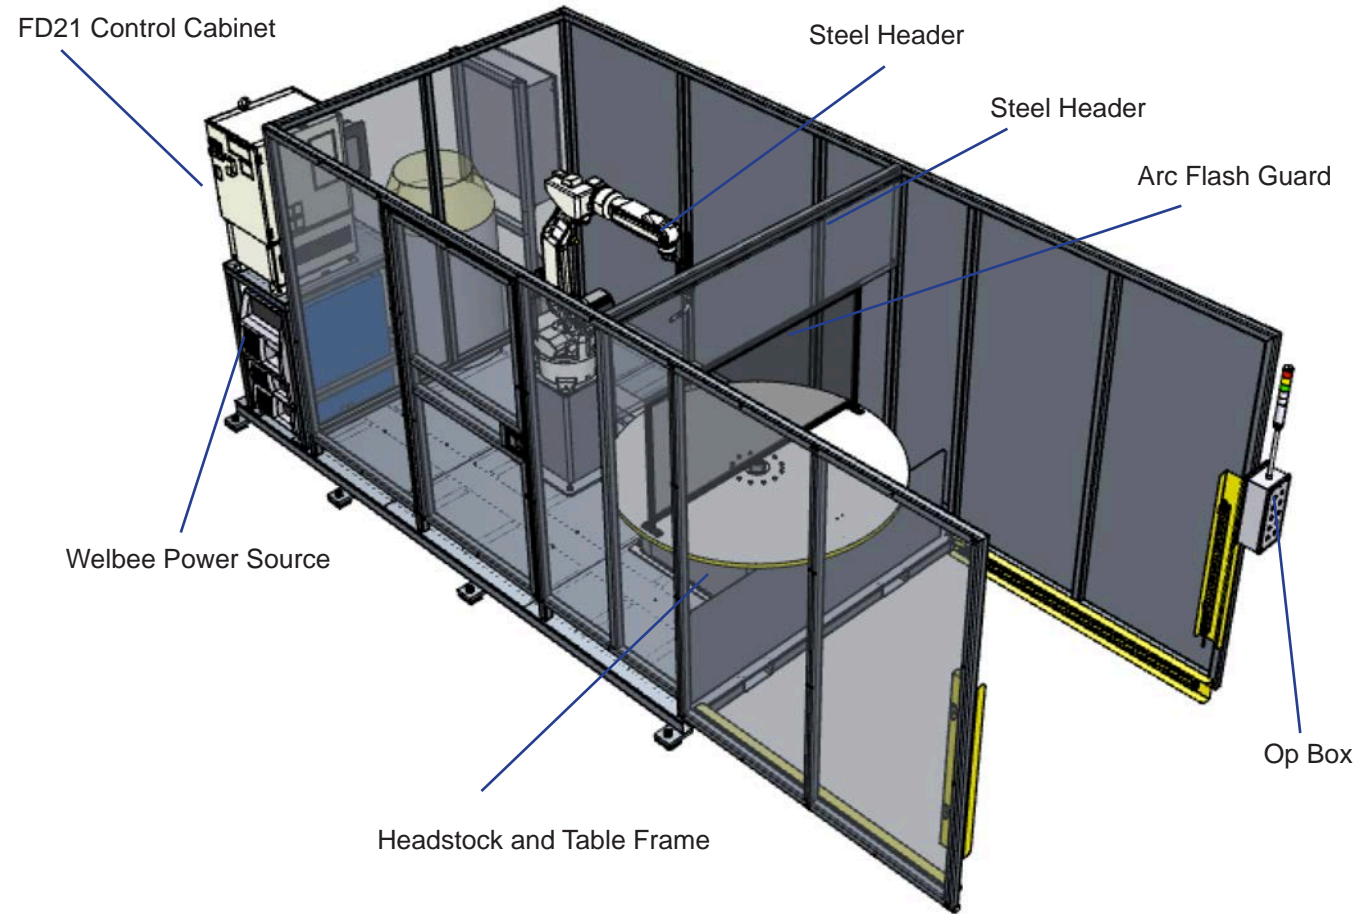

Standard Configuration:

SERVO-ARC 600

60" servo-driven indexing table

Details:

- 3" Through hole diameter in table top
- Index speed (180°) - 4.2 Seconds
- Work capacity – 250kg/side
- Weight – approx. 3000kg
- Standard fork lift pockets



Specifications

Footprint Dimensions:

Width: 2200mm (86.6")
 Height: 2235mm (88.0")
 Depth: 5511mm (217.0")

Manipulator Types:

- FD-V8
- FD-B6

Available I/O Slots:

23 Inputs/24 Outputs
 (Additional Power Supply needed for Outputs)

Other Options:

- A2PB-1000 headstock instead of servo-table
- Fixture mounting pattern in table top
- Torch cleaning station
- Station lighting
- Access door on RH side
- Safety fence on full base
- Basic layout (servo-arc 600B)
- Extended i/o