
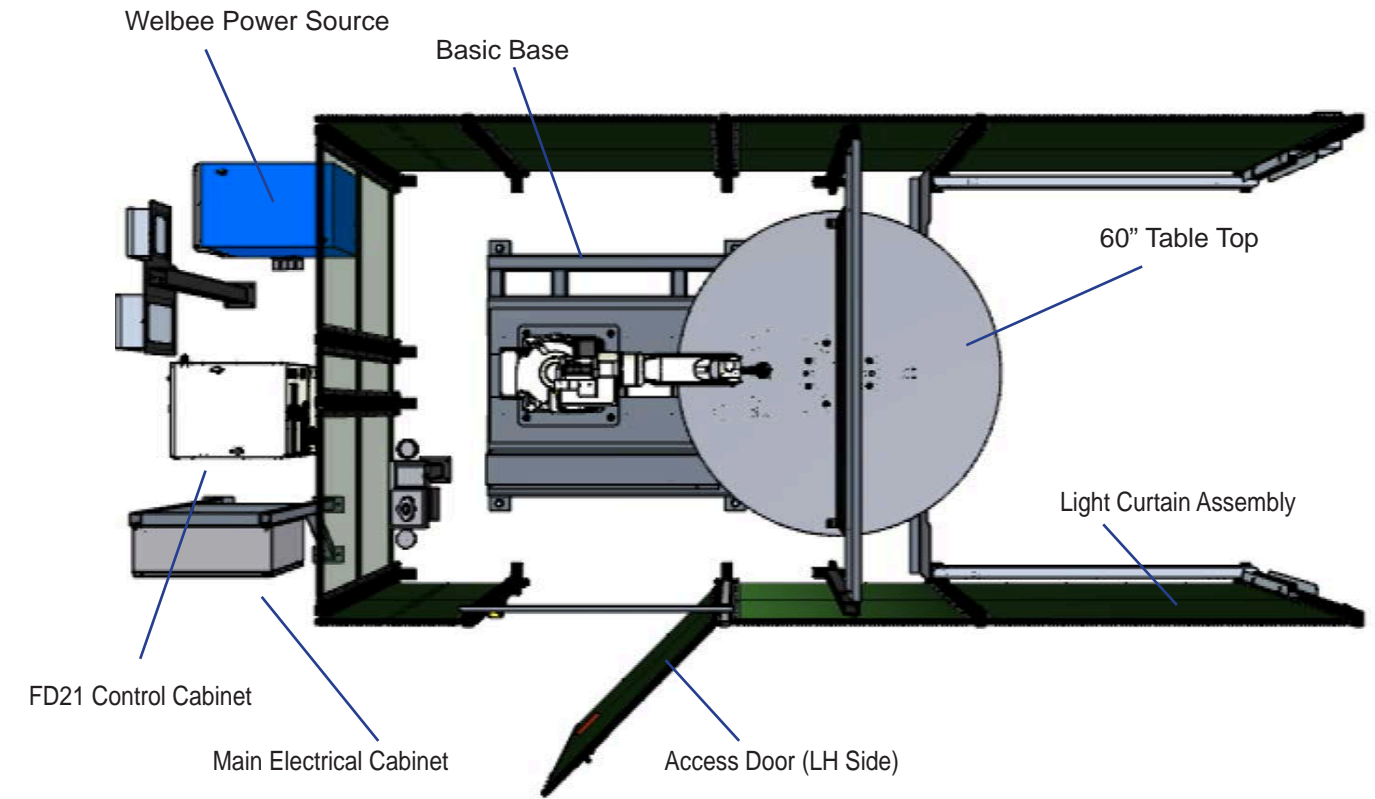


SERVO-ARC 600B

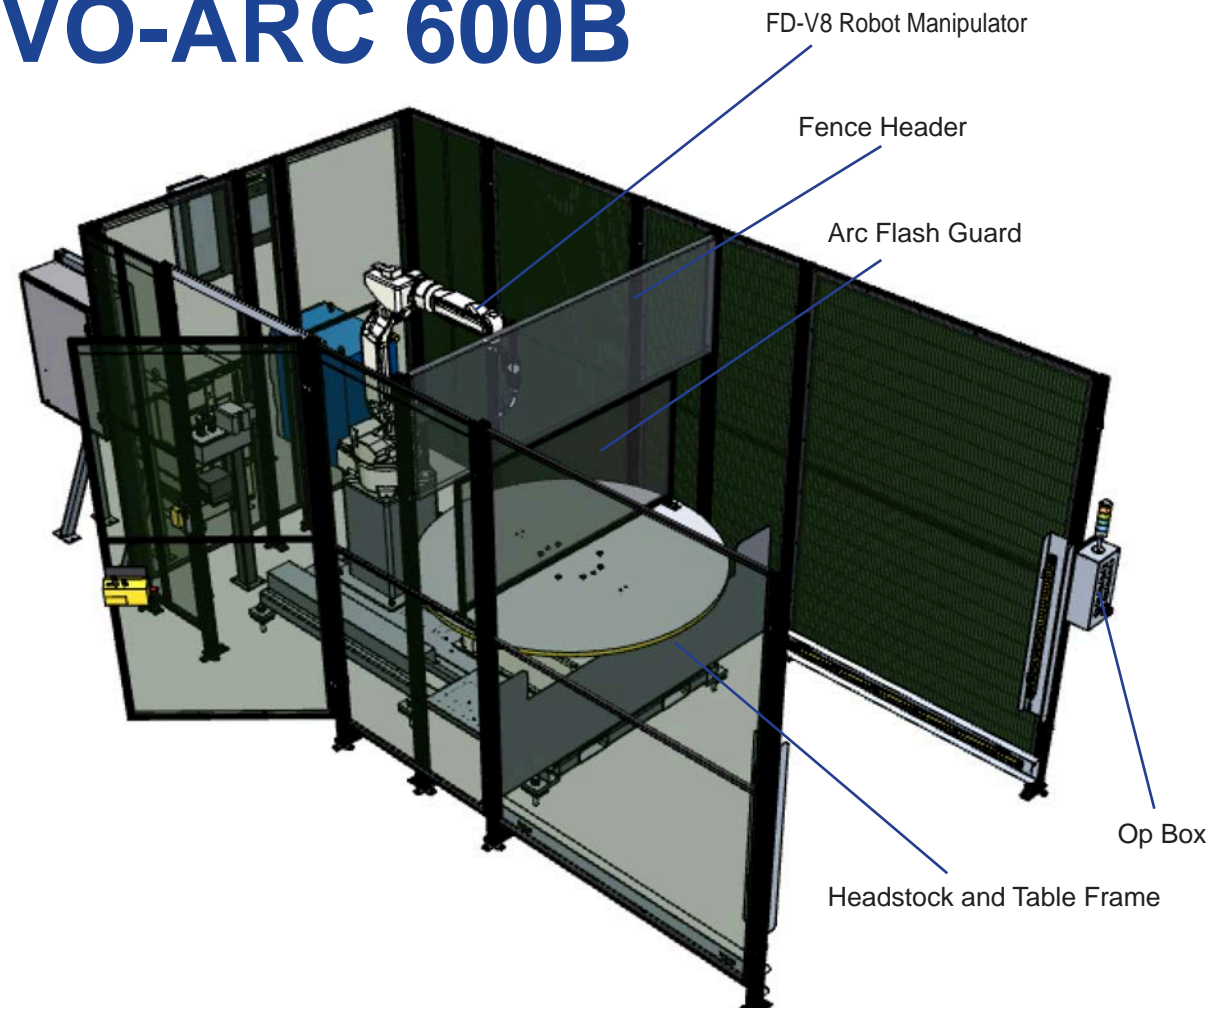

Standard Configuration:

SERVO-ARC 600B

60" servo-driven indexing table

Details:

- 3" Through hole diameter in table top
- Index speed (180°) - 4.2 Seconds
- Work capacity – 250 kg/side
- Weight – approx. 2000kg
- Standard fork lift pockets
- A2PB-1000 headstock instead of servo-table
- Floor mounted safety fencing w/ arc flash curtains



FD-V8



FD-B6

Specifications

Footprint Dimensions:

Width: 2263mm (89.1")
 Height: 2200mm (86.6")
 Depth: 5406mm (212.8")

Manipulator Types:

- FD-V8
- FD-B6

Available I/O Slots:

23 Inputs/24 Outputs
 (Additional Power Supply needed for Outputs)

Other Options:

- Fixture mounting pattern in table top
- Torch cleaning station
- Station lighting
- Access door on rh side
- Safety fence on full base
- Standard layout (servo-arc 600)
- Extended i/o
- Trailer (base)