
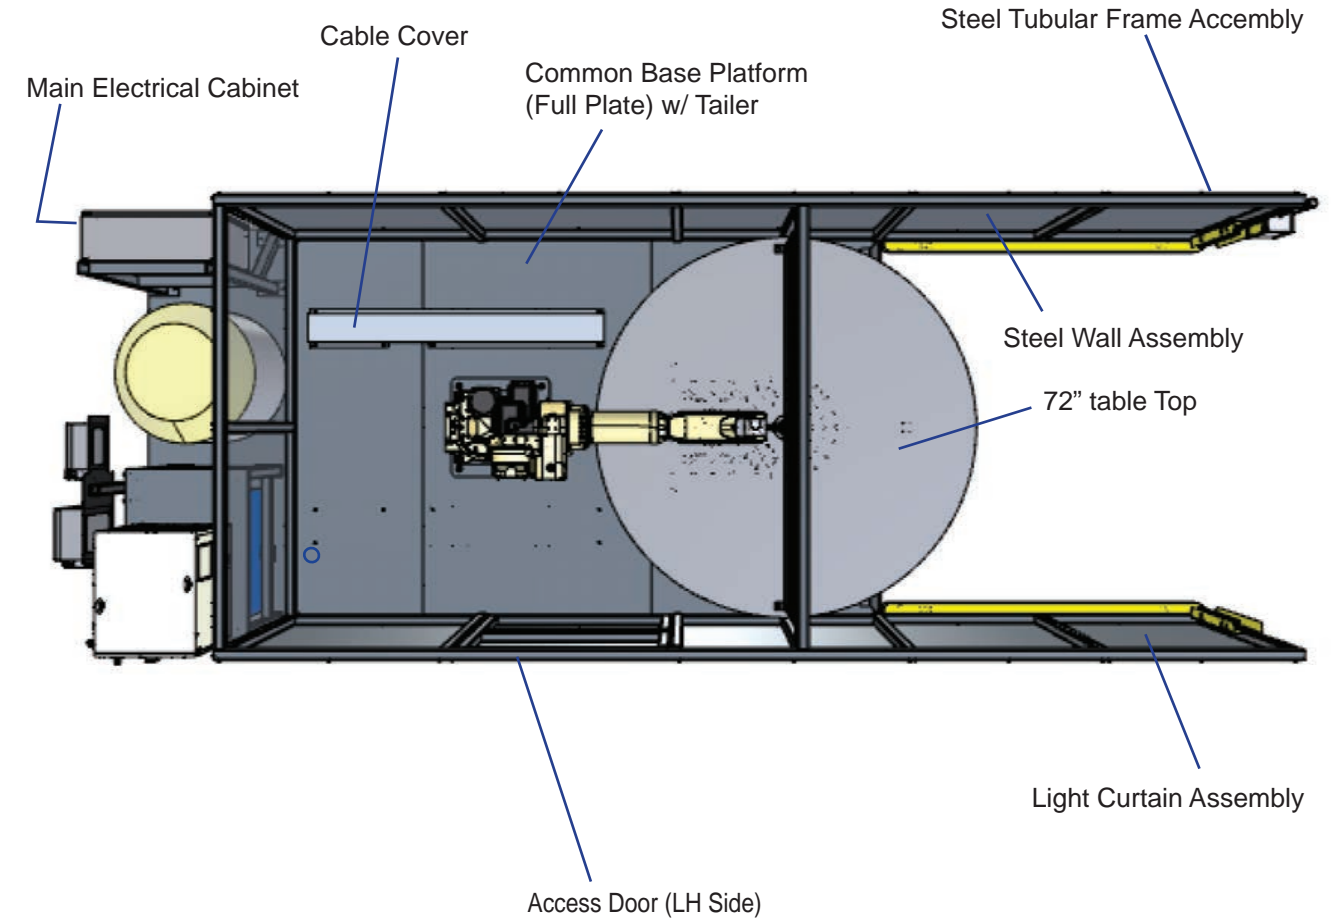


SERVO-ARC 720

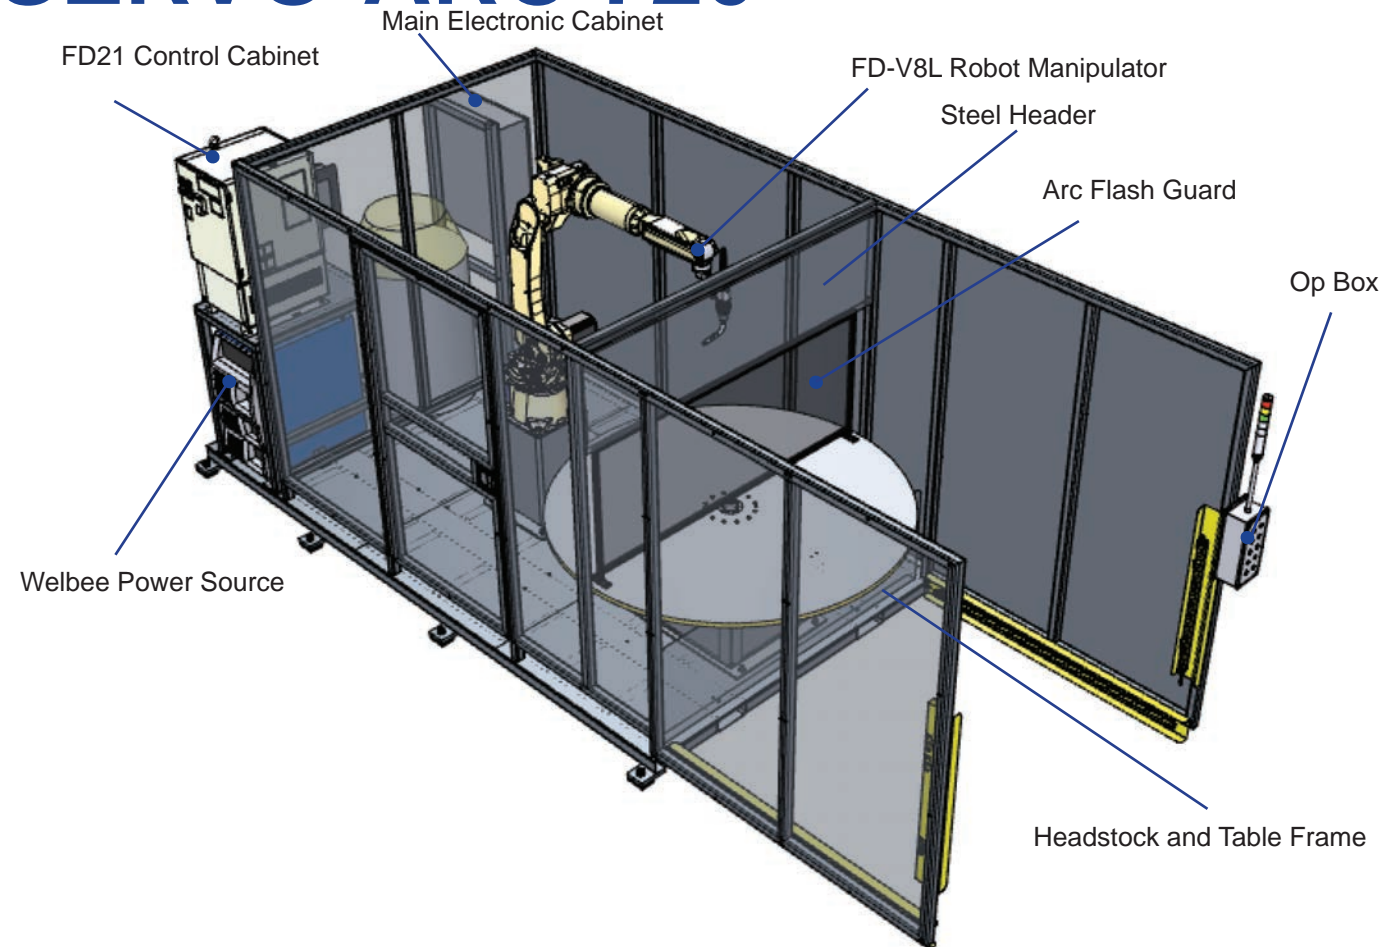

Standard Configuration:

SERVO-ARC 720

72" servo-driven indexing table

Details:

- 3" through hole diameter in table top
- Index Speed (180°) - 4.2 seconds
- Work capacity – 250kg/side
- Weight – approx. 3200kg
- Standard fork lift pockets



FD-V8L-S2

FD-B6L-S2

Specifications

Footprint Dimensions:

Width: 2200mm (86.6")
 Height: 2235mm (88.0")
 Depth: 5511mm (217.0")

Manipulator Types:

- FD-V8, FD-V8L-S2
- FD-B6, FD-B6L-S2

Available I/O Slots:

23 Inputs/24 Outputs
 (Additional Power Supply needed for Outputs)

Other Options:

- A2PB-1000 Headstock instead of servo-table
- Fixture mounting pattern in table top
- Torch cleaning station
- Station Lighting
- Access door on RH side
- Safety Fence on Full Base
- Dual manipulators
- Basic layout (SERVO-ARC 720B)
- Extended I/O